



**Addendum No. 2**

**August 27, 2019**

**Project: Glenoaks Boulevard Street Resurfacing and Highway Safety Improvement Project, Federal Project No. HSIPL-5202(018)  
Job. No. 7595 – Plan No. P-728**

---

The following changes shall apply for this project.

1. The federal wage decision was checked on this website <http://www.wdol.gov/scafiles/davisbacon/ca33.dvb> 10-days prior to bid opening. The applicable federal wage decision for this project is GENERAL DECISION CA20190022 7/26/19.

The following questions and answers are hereby incorporated into this project.

Q1. *Sheet 12 of 20, North corner of Glenoaks Blvd and Orange Grove Avenue intersection calls for the existing pull box that is in the existing ramp to be removed and replaced with a new pull box. The existing ramp is not being replaced per the Civil Plans and/or per the bid items. Will the ramp need to be replaced in its entirety or can we sawcut area around pull box only.*

A1. The removal of existing improvements within an existing curb ramp to remain, will be performed pursuant to the provisions of Section 300-2.1.1. No additional compensation will be made for the removal and replacement of the affected concrete area.

Section 300-2.1.1 of the special provisions describes the requirements for removing concrete. No section to be replaced shall be smaller than 30 inches in either length or width. If the saw cut in sidewalk, access ramp, or driveway would fall within 30 inches of a construction joint, expansion joint, or edge, the concrete shall be removed to the joint or edge, except that where the saw cut would fall within 12 inches of a score mark, the sawcut shall be made in and along the score mark.

The entire curb ramp may be replaced at the discretion of the Engineer, in which case, it will be paid for under the curb ramp bid item.

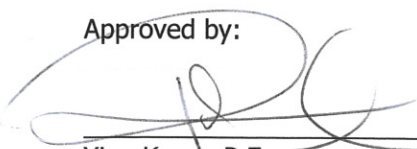
Q2. *Sheet 15 of 20, North & South corner of Glenoaks Blvd and Brand Blvd intersection calls for the removal of existing poles located in the existing ramps and the West corner calls for the replacement of existing pull boxes located on the ramps. The existing ramps are not being replaced per the Civil Plans and/or per the bid items. Will the ramps need to be replaced in their entirety or can we sawcut area around the poles and pull boxes only?*

A2. See response to Q1.

Indicate the receipt of Addendum 2 on Page P-3 of the Contractor's Proposal. **FAILURE TO DO SO WILL RENDER YOUR BID NON-RESPONSIVE.**

---

Approved by:

  
for Ying Kwan, P.E.  
City Engineer