

CITY OF SAN FERNANDO
CALIFORNIA

ADDENDUM NO.1
FOR
FISCAL YEAR 2023-2024
PHASE 3, ANNUAL STREET RESURFACING PROJECT
JOB NO. 7621, PLAN NO. P-743



Prepared by:



30336 Esperanza
RANCHO SANTA MARGARITA, CA 92688
(949) 888-6513

Date: 12/05/2023

ADDENDUM NO.1

- 1) The following change to the **Notice of Inviting Bids** shall apply for this project.

Previously stated as:

SEALED PROPOSALS will be received at the Office of the City Clerk, City Hall, 117 Macneil Street, San Fernando, California until 11:00 AM on Thursday, December 7, 2023.

Changed to:

SEALED PROPOSALS will be received at the Office of the City Clerk, City Hall, 117 Macneil Street, San Fernando, California until 11:00 AM on **Thursday, December 14, 2023.**

- 2) Please use the attached updated bid schedule (Attachment "A").
- 3) Hubbard Avenue from First Street to Fourth Street and San Fernando Road from Brand Boulevard to Kittridge Street has been updated to receive microsurfacing, in lieu of the 3-step process.
 - a. For these two sections, all pavement cracks **≥1/4-inch** wide shall be repaired. The following crack repair procedures shall be performed:
 - i. Remove loose particles, debris, dust, and organics from the cracks. These cracks should be brushed clean and blown with compressed hot air to remove debris, dust, and moisture. Weeds should be removed, and herbicides shall be sprayed. The cracks should be dry before applying crack fill material.
 - ii. Crack fill shall be squeegeed flush to 1/4-inch below flush.

Crack seal material shall be a hot-applied, rubberized crack-fill material, such as CRAFCO Polyflex Type 3 sealant or equal.

Product Delivery, Storage, and Handling must comply with manufacturer's recommendations.

If required to complete the work, contractor shall post "No Parking" signs and notify all residents.

Cracks repairs must be performed at least **2 weeks** prior to applying microsurfacing.

Crack seal bid price (item number 5 in the bid schedule below): Pavement Crack Sealing shall be paid for at the LUMP SUM contract price with bid item 5, and shall include full compensation for all labor, notification, traffic control, materials, tools and equipment necessary. Item number 5 includes the pricing to perform crack sealing on Hubbard Avenue from First Street to Fourth Street and San Fernando Road from Brand Boulevard to Kittridge Street. The remaining streets in the project will not receive crack sealing.

- 4) The City will consider the base bid items cost.
- 5) This project does not involve micromilling.

BID SCHEDULE
FISCAL YEAR 2023-2024 PHASE 3, ANNUAL STREET RESURFACING PROJECT
JOB NO. 7621, PLAN NO. P-743

STREETS IMPROVEMENTS					
BASE BID					
ITEM NO.	DESCRIPTION	UNIT	ESTIMATED QUANTITY	UNIT PRICE	ITEM TOTAL
1.	PROVIDE TRAFFIC CONTROL	LS	1	\$	\$
2.	REMOVE AND CONSTRUCT PCC CURB AND GUTTER PER SSPWC STANDARD PLAN 120-3	LF	410	\$	\$
3.	REMOVE AND CONSTRUCT PCC CURB TO MATCH EXISTING	LF	100	\$	\$
4.	REMOVE AND CONSTRUCT PCC CROSS GUTTER TO MATCH EXISTING	SF	60	\$	\$
5.	CRACK SEALING (HUBBARD AVENUE FROM FIRST STREET TO FOURTH STREET AND SAN FERNANDO ROAD FROM BRAND BOULEVARD TO KITTRIDGE STREET)	LS	1	\$	\$
6.	MICROSURFACING TYPE III	TN	730	\$	\$
7.	ARAM 3/8" SCREENINGS	SF	285,588	\$	\$
8.	EMULSION-AGGREGATE SLURRY TYPE II WITH 2.5 % LATEX	TN	420	\$	\$
9.	6" DIG-OUTS REMOVAL	SF	13,000	\$	\$
10.	6" DIG-OUTS TYPE IIIC3 PG 64-10 (R15) AC CONSTRUCTION	TN	490	\$	\$
11.	FURNISH AND INSTALL SIGNING, CURB MARKINGS, STRIPING AND PAINT ALL HOUSE NUMBERS WITHIN PROJECT LIMITS	LS	1	\$	\$
12.	ADJUST WATER VALVE BOX FRAME AND COVER TO GRADE	EA	127	\$	\$
13.	ADJUST MANHOLE FRAME AND COVER TO GRADE	EA	57	\$	\$
14.	ADJUST GAS VALVE BOX FRAME AND COVER TO GRADE	EA	6	\$	\$
15.	3-STEP PROCESS TEST STRIP (PER ALL PROJECT REQUIREMENTS)	LS	1	\$	\$
16.	RESIDENT NOTIFICATIONS	LS	1	\$	\$
SUBTOTAL ITEMS 1-16					\$

STREETS IMPROVEMENTS
OPTIONAL SCOPE: FOR FOURTH STREET, CHATSWORTH DRIVE, AND HUBBARD AVENUE
FRONTAGE ROAD

ITEM NO.	DESCRIPTION	UNIT	ESTIMATED QUANTITY	UNIT PRICE	ITEM TOTAL
1.	PROVIDE TRAFFIC CONTROL	LS	1	\$	\$
2.	REMOVE AND CONSTRUCT PCC PANEL AT VARIOUS LOCATIONS	SF	240		
3.	REMOVE AND CONSTRUCT PCC CURB TO MATCH EXISTING	LF	22	\$	\$
4.	REMOVE AND CONSTRUCT PCC CURB AND GUTTER PER SSPWC STANDARD PLAN 120-3	LF	32	\$	\$
5.	MICROSURFACING TYPE III	TN	450	\$	\$
6.	ARAM 3/8" SCREENINGS	SF	227,639	\$	\$
7.	EMULSION-AGGREGATE SLURRY TYPE II WITH 2.5 % LATEX	TN	330	\$	\$
8.	6" DIG-OUTS REMOVAL	SF	3,100	\$	\$
9.	6" DIG-OUTS TYPE IIIC3 PG 64-10 (R15) AC CONSTRUCTION	TN	120	\$	\$
10.	FURNISH AND INSTALL SIGNING, CURB MARKINGS, STRIPING AND PAINT ALL HOUSE NUMBERS WITHIN PROJECT LIMITS	LS	1	\$	\$
11.	ADJUST WATER VALVE BOX FRAME AND COVER TO GRADE	EA	80	\$	\$
12.	ADJUST MANHOLE FRAME AND COVER TO GRADE	EA	30	\$	\$
13.	ADJUST GAS VALVE BOX FRAME AND COVER TO GRADE	EA	3	\$	\$
14.	RESIDENT NOTIFICATIONS	LS	1	\$	\$
SUBTOTAL OPTIONAL SCOPE ITEMS 1-14					\$

The bidder acknowledges receipt of the following addendum issued for the above project. If no addendum has been received, write "None".

List of Addendum Received: _____


The City does not expressly or by implication agree that the actual amount of work will correspond with the foregoing quantities, but reserves the right to increase or decrease the amount of any class or portion of the work or to omit portions of the work as may be deemed necessary or advisable by the Engineer.

The bidder further agrees that in case of not executing the required contract with necessary bonds within ten (10) days, not including Sundays, after having received notice that the contract is ready for signature, the proceeds of the check or bond accompanying his bid shall become the property of the City of San Fernando.


By submission of the Contractor's Proposal, the bidder also certifies that the bid is a balanced bid.

LEGEND

- THREE STEP PROCESS STREET
- OPTIONAL THREE STEP PROCESS STREET
- THREE STEP PROCESS TEST STRIP
- CRACK SEAL AND MICROSURFACING

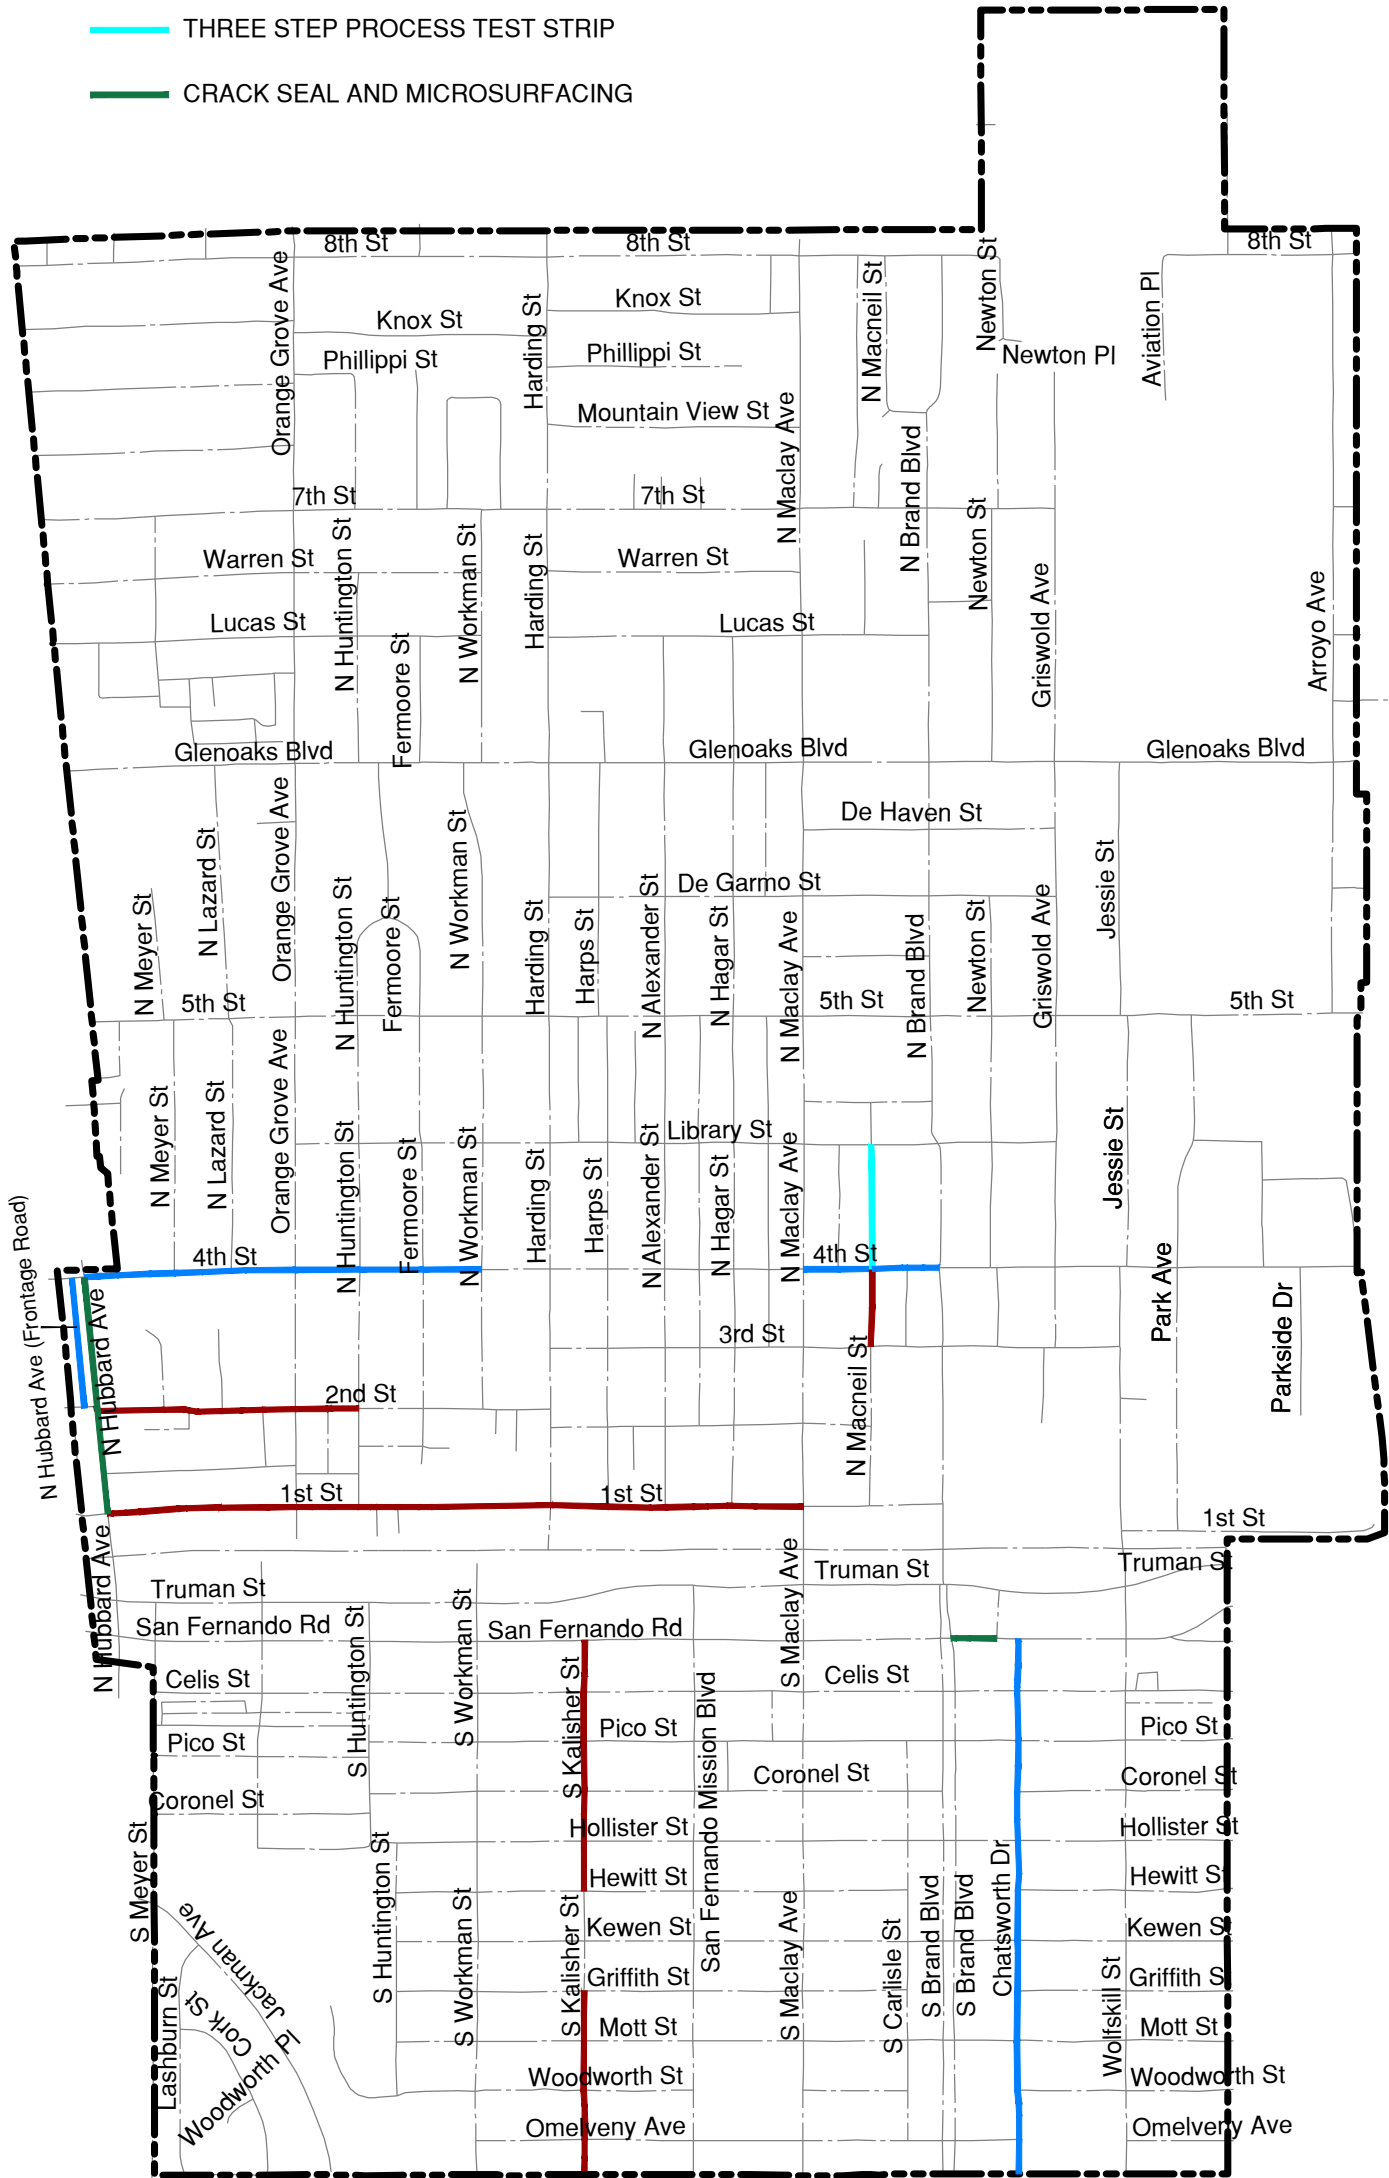

DRAWING: q:\2021\21-280-00\dwg\phase 3 final street map.dwg PLOTTED: 12/5/2023 10:26 AM BY: Jesus Meza



**San Fernando Phase 3
Street Map**



Date: December 5, 2023
Project No.: 21-280-00

Plate
1